

CGS series

sales016@heyuecap.com

- Chip type with 6.3Φ~16Φ, 125°C, 1000 hours~2000 hours, long life product.
- Designed For automobile modules and other high temperature applications.
- RoHS Compliance.
- 6.3Φ~16ΦV-Chip 型, 125°C, 1000小時~2000小時 長壽命產品。
- 專為汽車模塊和其它高溫應用設計。



SPECIFICATIONS

Items 項 目	Characteristics 特性									
Capacitance Tolerance 靜電容量誤差	± 20%(120Hz,20℃)									
Operating Temperature Range 適用溫度範圍	-55 ~ +125℃									
Rated Voltage Range 額定電壓範圍	6.3 ~ 100VDC									
Capacitance Range 靜電容量範圍	1 ~ 4700μF									
Leakage Current 洩漏電流	I ≤ 0.01CV or 3(μA) · which is greater. (After 3 minutes application of DC rated voltage, at 20℃)									
Dissipation Factor 散逸因素(tan δ)	Measurement Frequency: 120Hz. Temperature: 20℃									
	Rated Voltage(V)	6.3	10	16	25	35	50	63	100	
	tan δ(Max)	0.30	0.24	0.20	0.16	0.14	0.14	0.12	0.10	
Low Temperature Stability 低溫特性	Measurement Frequency: 120Hz.									
	Rated Voltage(V)	6.3	10	16	25	35	50	63	100	
	Impedance Ratio(Max) Z(-25℃)/Z(20℃)	4	3	2	2	2	2	2	2	
	阻抗比率(最大值) Z(-40℃)/Z(20℃)	8	6	4	3	3	3	3	3	
Load Life 負荷壽命	6.3V~50V:2,000hours (ΦD =6.3mm1,000hours);63V~100V:1,500 hours with application of rated voltage at 125℃									
	Capacitance Change	within ±30% of Initial Value								
	tan δ	300% or less of Initial Specified Value								
	Leakage Current	Initial Specified Value or less								
Shelf Life 放置壽命	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours 125℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4.									
	Capacitance Change	Within ± 30% of Initial Value								
	tan δ	300% or less of Initial Specified Value								
	Leakage Current	Initial Specified Value or less								
Resistance to Soldering Heat 焊錫耐熱性	The capacitors shall be kept on the hot plate maintained at 250℃ for 30 seconds. After removing from the hot plate and restored at room temperature they meet the characteristics requirements listed at right.				Capacitance Change		Within ± 10% of Initial Value			
					tan δ		Initial Specified Value			
					Leakage Current		Initial Specified Value or less			
Standards 參照標準	IEC 60384-4 (JIS C 5101-4)									

Frequency Coefficient of Permissible Ripple Current


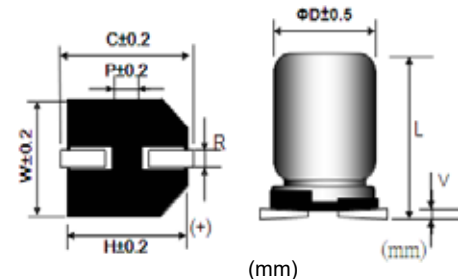

Frequency (Hz)	100 $\leq$ F < 1K	1K $\leq$ F < 10K	10K $\leq$ F < 100K	100K $\leq$ F
Capacitance (μ F)				
C $\leq$ 22	0.50	0.80	0.90	1.00
22 < C $\leq$ 150	0.65	0.85	0.92	1.00
150 < C	0.70	0.85	0.95	1.00

CGS series

sales016@heyuecap.com

DIMENSIONS(mm)

Chip Type

Fig.1 $\Phi D=6.3\sim 10\text{mm}$ Fig.2 $\Phi D\geq 12.5\text{mm}$ 

Size	ΦD	$L \pm 0.5$	W	H	C	R	P	Vmax
6.3 × 6	6.3	6.0 ± 0.3	6.6	6.6	7.3	0.5~0.8	2.1	0.3
6.3 × 7.7	6.3	7.7 ± 0.3	6.6	6.6	7.3	0.5~0.8	2.1	0.3
8 × 10	8.0	10.0 ± 0.5	8.3	8.3	9.0	0.7~1.1	3.2	0.3
10 × 10	10.0	10.0 ± 0.5	10.3	10.3	11.0	0.7~1.3	4.5	0.3
12.5 × 13.5	12.5	13.5 ± 0.5	13.0	13.0	13.7	1.1~1.4	4.5	0.4
16 × 16.5	16.0	16.5 ± 0.5	17.0	17.0	18.0	1.4~1.8	6.4	0.4

STANDARD RATINGS

D×L(mm) ; R.C.(mA rms) at 125°C 100KHz, ESR(Ω max) at 20°C 100KHz.

Cap (μF)	V	6.3			10			16			25		
Item		D x L	R.C.	ESR	DxL	R.C.	ESR	D x L	R.C.	ESR	D x L	R.C.	ESR
33											6.3x6	70	1.6
47					6.3x6	70	1.6	6.3x6	70	1.6	6.3x7.7	110	0.90
100	6.3x6	70	1.6		6.3x7.7	110	0.90	8x10	160	0.40	6.3x7.7	110	0.90
											8x10	160	0.40
220	6.3x7.7	110	0.90		6.3x7.7	110	0.90	8x10	160	0.40	8x10	160	0.40
					8x10	160	0.40				10x10	220	0.30
330	8x10	160	0.40		8x10	160	0.40	10x10	220	0.30	10x10	220	0.30
470	8x10	160	0.40		10x10	220	0.30	12.5x13.5	550	0.12	12.5x13.5	550	0.12
680	10x10	220	0.30		12.5x13.5	550	0.12	12.5x13.5	550	0.12	12.5x13.5	550	0.12
1000	12.5x13.5	550	0.12		12.5x13.5	550	0.12	12.5x13.5	550	0.12	16x16.5	900	0.08
1500	12.5x13.5	550	0.12		12.5x13.5	550	0.12	16x16.5	900	0.08	16x16.5	900	0.08
2200	12.5x13.5	550	0.12		16x16.5	900	0.08	16x16.5	900	0.08			
3300	16x16.5	900	0.08		16x16.5	900	0.08						
4700	16x16.5	900	0.08										

Cap (μF)	V	35			50			63			100		
Item		D x L	R.C.	ESR	DxL	R.C.	ESR	D x L	R.C.	ESR	D x L	R.C.	ESR
1					6.3x6	45	3.5						
2.2					6.3x6	45	3.5						
3.3					6.3x6	45	3.5						
4.7	6.3x6	60	2.0		6.3x6	45	3.5						
10	6.3x6	70	1.6		6.3x6	50	2.8				8x10	70	1.00
22	6.3x6	70	1.6		6.3x7.7	80	2.0	8x10	100	1.00	8x10	70	1.00
33	6.3x7.7	110	0.90		6.3x7.7	80	2.0	8x10	100	1.00	10x10	115	0.80
					8x10	140	0.70						
47	6.3x7.7	110	0.90		8x10	140	0.70	8x10	100	1.00	12.5x13.5	350	0.33
	8x10	160	0.40		10x10	240	0.50	10x10	150	0.50			
100	8x10	160	0.40		10x10	240	0.50	10x10	150	0.50	16x16.5	500	0.24
	10x10	220	0.30		12.5x13.5	490	0.23	12.5x13.5	350	0.25			
220	10x10	220	0.30		12.5x13.5	490	0.23	12.5x13.5	350	0.25			
	12.5x13.5	550	0.12					16x16.5	500	0.18			
330	12.5x13.5	550	0.12		12.5x13.5	490	0.23	16x16.5	500	0.18			
					16x16.5	800	0.15						
470	12.5x13.5	550	0.12		16x16.5	800	0.15	16x16.5	500	0.18			
	16x16.5	900	0.08										
680	16x16.5	900	0.08		16x16.5	800	0.15						
1000	16x16.5	900	0.08										